

MARATHON PRODUCTS

3C\TEMP-USB™ & 3C\TEMP-RH™

Multi-use Temperature and Humidity Loggers with Real-Time LCD Display for Instant Quarantine Decisions.



Now
Bluetooth
enabled

3C\TEMP-USB & 3C\TEMP-RH are revolutionary, multi-use, user programmable, electronic temperature data recorders specifically designed for measuring temperatures during the transportation of refrigerated vaccines, biological material, chemicals, pharmaceuticals, and for documenting the transportation of perishable commodities. They are NIST-Traceable and come with Certificates of Conformance. Single-use versions are available.

Functions include:

- Internal Thermistor: accurately records time and temperatures for user selectable readings in Celsius or Fahrenheit.
- LCD display: Real-time viewing of Current temperature, Max/Min Temperature, Run Time, Alarm Status, and Recording.
- The 3C\TEMP-RH also records relative humidity values.

Bluetooth models available: Our Bluetooth devices use the Nordic chip with a range of 30 meters.

Small Form Factor: These units have an extended battery life and can endure rough handling. The internal software records the following: time mechanism, start time, sampling intervals, end description for special instructions, alarm values, recording status, measurement data, software version, serial and tracking number, model type and after the fact report generation options.

Visual Alarms: All our data loggers can be programmed with alarm limits. Should the temperature reach levels outside these limits, the LDC will display "ALARM." To start the recorder, simply press the start button!

Computer Ready: Marathon's easy-to-use MaxiThermal2 software is available for Microsoft Windows 7, 8, 8.1 & 10. Simply plug the unit into a standard USB port on your PC. The Maxi-Thermal2 software and USB cable are available separately.

Temperature Range

-29° C to +72° C
-20° F to +160° F

Temperature Accuracy

(NIST traceable)
±0.5°C from 0° to 10°C
±1.0°C at extremes

Memory EEPROM, Storage

8k per sensor

Humidity Range

0% to 100%

Humidity Accuracy


(NIST traceable)
±3% from 0% to 80%
±5% from 80% to 100%

MARATHON



PRODUCTS, INC. *Don't ship without us!®*

MaxiThermal2 Software Highlights: Easy-to-use software provides clear graphs. Report Summary & Statistics File Manager, Note Attachment, Zoom, Elapsed Time or Date/Time View, Recorded View, Celsius or Fahrenheit. Data can be exported to other Windows programs such as spreadsheets, word-processing or databases. Available for Windows 7 & 8.1 and 10. An Enterprise Software version and 21CFR Part 11 Compliant Software are available.

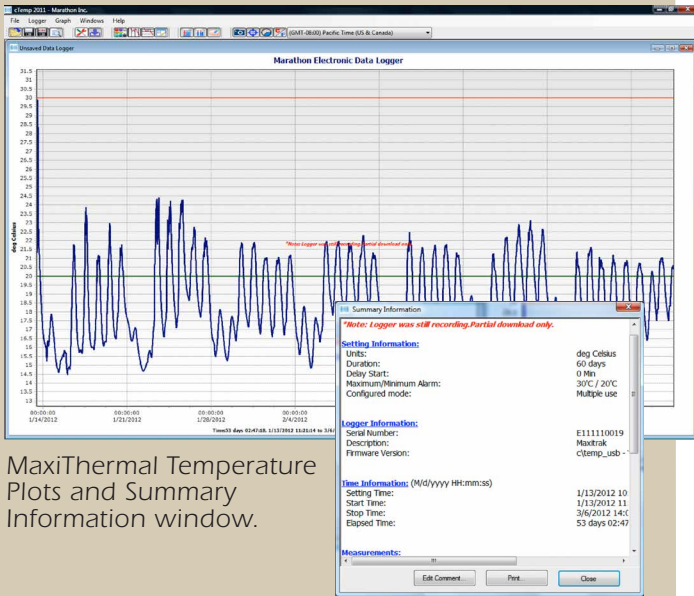



MaxiThermal Temperature Plots and Summary Information window.

- 3CTEMP-USB** SKU #7060 & **3CTEMP-USB Single-use** SKU #7063
- 3CTEMP-USB Bluetooth** SKU #7060-BT
- 3CTEMP-USB Bluetooth Single-use** SKU #7063-BT
- 3CTEMP-RH** SKU #7061 & **3CTEMP-RH Single-use** SKU #7064
- 3CTEMP-RH Bluetooth** SKU #7061-BT
- 3CTEMP-RH Bluetooth Single-use** SKU #7064-BT

- Memory EEPROM, Storage:** 3CTEMP-USB: 8k Temperature, 3CTEMP-RH: 8k Temperature, 8K RH
- Temperature Range:** -29° C to +72° C / -20° F to +160° F
- Temperature Accuracy:** ±0.5° C from 0° C to 10° C, ±1.0° C at extremes, ±0.9° F from 32° F to 50° F, ±1.8° F at extremes
- Temperature resolution:** 0.1° C / 0.18° F
- Temperature Sensor:** 3CTEMP-USB: Wired chip in glass thermistor, 3CTEMP-RH: MEMS
- Humidity - 3CTEMP-RH only:** Humidity sensor: CAPACITIVE MEMS, Humidity range: 0 to 100%, Humidity accuracy: ±3% from 0 to 80%, ±5% from 80 to 100%, Humidity resolution: 0.1%
- Measurement Intervals:** User programmable from 2 seconds to months. Single-use versions are pre-programmed.
- High and low alarm limits:** LED indicator
- Computer Interface:** Mini USB connector, Bluetooth (BT models only)

Internal Firmware Provides: Internal Clock, Start time, Interval, User description, Alarm values, Recording status, Measurement data, Firmware version, Serial number, Model type.

- Power Source:** CR2450 Battery
- Battery Life:** 3CTEMP-USB: 3 years, 3CTEMP-RH: 2 years
- Warranty:** 12 months
- Size:** Length: 6.5 cm (2.5 in.), Width: 3.4 cm (1.3 in.), Depth: 0.9 cm (0.35 in.)
- Weight:** 33 g (1.16 oz.)
- Options:** MaxiThermal2 software, USB Cable
- Waterproof Enclosure:** The 3CTEMP-USB is hermetically sealed to an IP66 rating.

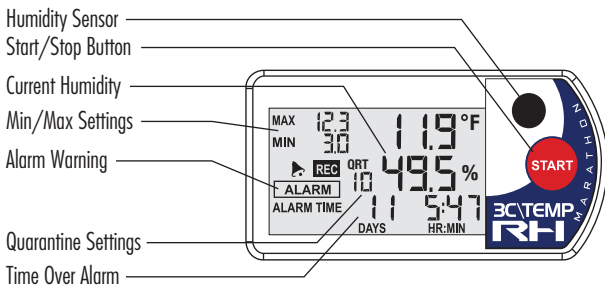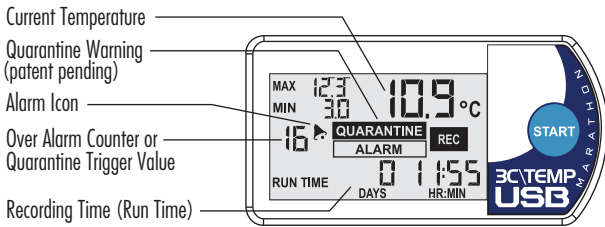

Please call 1-510-562-6450
for more information or to place an order.

www.marathonproducts.com

14500 Doolittle Drive, San Leandro, CA 94577 ▪ jnakagawa@marathonproducts.com
Specifications subject to change without prior notice.