

MARATHON PRODUCTS

microDL-200C™

Cryogenic Temperature Data Logger




THERMAL DATA LOGGER - OPERATING RANGE -200°C to 72°C.

These high-precision laboratory-grade products will operate up to 3 years without a battery change. View current and stored data, prior to downloading to a computer, by scrolling through the screen displays, including high, low, elapsed time, alarm excursions and Mean Kinetic Temperature.

Monitor and validate your critical stem cells and biologics during transportation and storage with our micro display loggers. In conjunction with our MDAS-Pro or 21CFR compliant software, the microDL-200°C will document your liquid nitrogen stored products for your GxP and FDA regulated environment. 21CFR compliant software is available with full database capabilities

Find out and document what you've been missing!

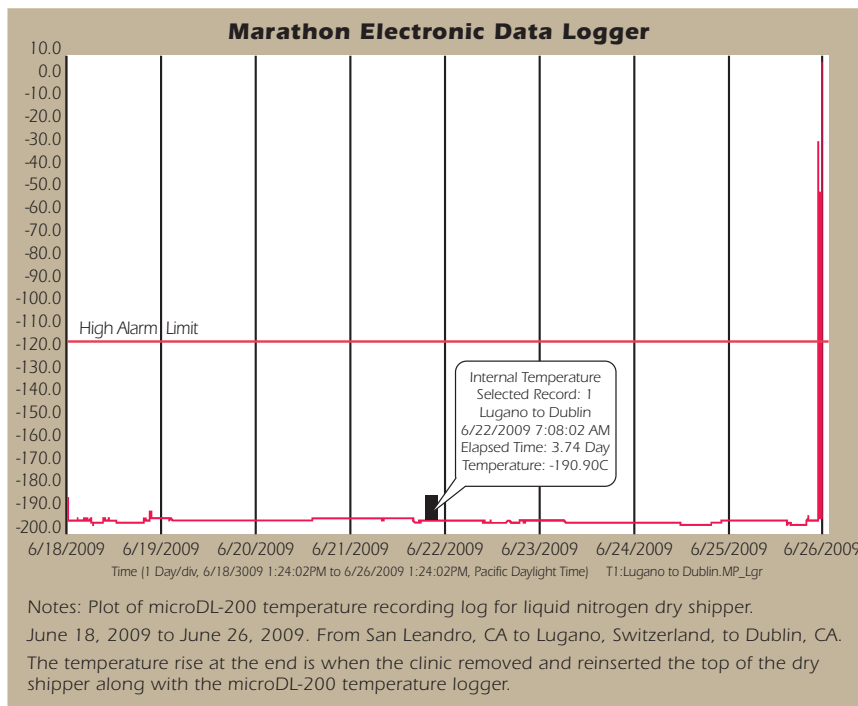

An example plot of temperature data for an 8 day international shipment.

DISPLAY EXAMPLES

Press the Start button to see the following information display with each press of the start button:



1. REC -198.5°C
shows recording and current temperature



5. LOW -199.9°C
shows alarm has occurred and low temperature



2. RUN 176 D
shows elapsed time in days



6. HI HR 0.5
shows alarm time hours over high threshold



3. MKT -198.1°C
shows mean kinetic temperature (available on silver model only)



7. LOW HR 0.0
shows alarm time hours over low threshold



4. HI 23.1°C
shows alarm has occurred and high temperature



8. REC -198.5°C
Push to return to current temperature

microDL-200C Specifications

EEPROM Memory	32K (approx. 32,000 measurements)
Temperature Range	
High	72°C / 162°F / 345.2°K
Low	-200°C / 328°F / 73.5°K
Temperature Accuracy	
At zero	±0.5°C at 20°C
Extremes	±1.0°C at -200°C
Measurement Intervals	User programmable from 2 seconds to 2 months
Features	
Power Source	(2) 3 volt lithium coin cells. 5 year shelf life with approx. 2 year continuous operating mode.
Alarm Limits	High & Low Alarms (ALR) set by temperature and time
Computer Interface	USB cable with IR infrared detectors
Weight	1 oz. / 30g.
Height	1.9 cm (0.75 in.)
Diameter	2.86 cm (1.25 in.)
Water-resistant -	Product package hermetically sealed to a IP66 rating
SKU #8106: Standard Stainless Steel Probe	
Length	61 cm (24 in.)
Outside Diameter	3.49 mm (0.136 in.)
Inside Diameter	2.5 mm (0.099 in.)
SKU #8100: Flexible Teflon Probe with Stainless Steel Tip	
Total Length	50.8 cm (20 in.)
Stainless Steel Tip	15.24 cm (6 in.)
Outside Diameter	3.49 mm (0.136 in.)
Inside Diameter	2.5 mm (0.099 in.)
Custom Probe Lengths	Available
Reader Station	USB Port Interface
MDAS-Pro Software	Compatible with Windows XP, Vista, 7, 8 and 10
Warranty	60 days



Please call 1-510-562-6450
for more information or to place an order.

www.marathonproducts.com

14500 Doolittle Drive, San Leandro, CA 94577 ▪ sales@marathonproducts.com

Specifications subject to change without prior notice.

